


# 1008

## Magnetic field generator system

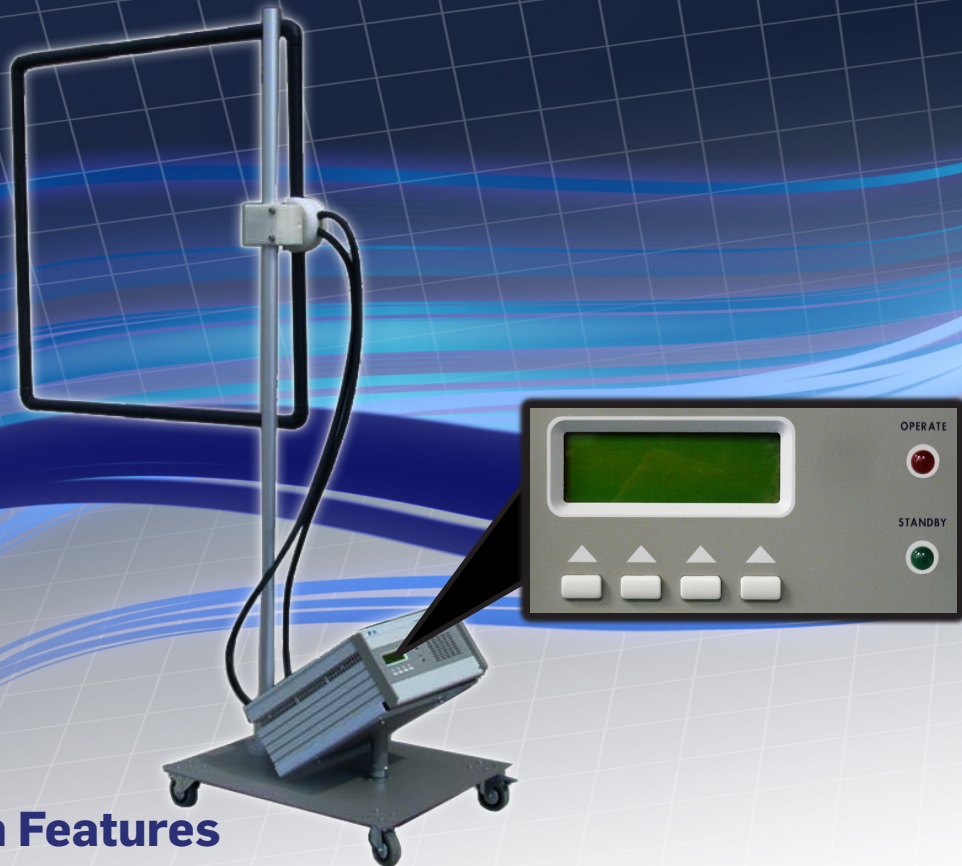

### Main Features

- Meets IEC/EN 61000-4-8 standard
- Suitable for 50/60 Hz power lines
- Continuous, Intermittent and Manual mode operation
- Up to 170 A (continuous) and 1200 A (5 sec.) output current
- LCD display, functional keys and Led indicators
- Automatic level adjustment
- Interlock key for additional safety
- User port to drive external switches
- Different loop antennas available (option)
- Swivel joint for immediate loop orientation change
- Generous screw terminals for safe connection
- Large wheeled baseplate for repeatable grounding and easy positioning

The 1008 is a high current generator for testing power frequency magnetic field immunity according to the IEC/EN 61000-4-8 standard.

The shape and size of the generated magnetic field are defined by the loop antenna in use; different loop antennas can be separately ordered as an option.

All the tests required by the basic standard IEC/EN 61000-4-8 (full immersion, proximity, continuous, intermittent) can be easily controlled (test mode, level, timing) either by the built-in software, via the soft keys on the front panel of the equipment, or by integrating control with the laboratory's own commercial or proprietary software.

The loop antenna is supported by a wheeled double mast with a pair of specially designed swivels so the loop can be turned quickly and easily in the direction most convenient to the test engineer.

Due to the weight of the heavy-duty components, the 1008 needs a robust and stable mechanical structure that provides repeatable grounding; the stand is combined with one of the two masts of the antenna and can be easily moved across the lab and on the test plane.

# 1008

## Magnetic field generator system

### SPECIFICATIONS

Current waveform	50/60 Hz, sine waveform	
I/O Interface	(protocol available for software developers) RS-232; user port for hardware interlock key and external switch	
Display	LCD, four 20-character lines	
LED indicators	Operate, Standby	
Power supply	230 Vac $\pm$ 10 % - 50/60 Hz, 16 A max	
Output voltage without load	4 Vac max	
Continuous and Intermittent mode		
Max output current	170 A (continuous); 1200 A (intermittent)	
Internal timer	1 to 200 h (continuous); 1 to 5 sec (intermittent)	
Timer resolution	1 min (continuous); 1 sec (intermittent)	
Manual mode		
Max output current	16 A or 160 A (selectable)	
Operating temperature	-10 °C to +40 °C	
Storage temperature	-40 °C to +50 °C	
Dimensions and weights (W x H x D)		
Generator	365 x 200 x 480 mm	28,0 kg
Cart (w 35deg support)	550 x 360 x 650 mm	23,6 kg
High current cable (x2)	$\varnothing$ 19 x 1500mm	1,6 kg
Swivel joint	140 x 140 x 200 mm	2,4 kg
Loop double mast	$\varnothing$ 40 x 1900 mm	1,7 kg
TOTAL	550 x 2000 x 650 mm	57,3 kg



### Ordering information:

**1008-01** - 1008 Magnetic field generator system  
Includes: Power supply cable, 550 x 650 mm cart, 35deg generator support, 2 pcs. 1.5 m high current cables, swivel joint, loop double mast, RS232 cable, hardware interlock key, user's manual, standard calibration certificate.

### Optional accessories:

- 1008-02** - Square loop 1 m
- 1008-03** - Square loop 1,5 m\*
- 1008-04** - Square loop 2 m\*
- 1008-05** - Rectangular loop 2,6 x 1 m\*
- 1008-06** - Circular loop 1 m
- 1008-07** - Circular loop 40 cm

\*Additional cart, joint and mast are provided for installation



## Related products and services

### Generators/Amplifiers/Receivers/Systems

- 3010: EMI Signal Generator 9 kHz to 1 GHz
- 3030: EMI Signal Generator 9 kHz to 3 GHz
- 6000N: Power Amplifier 9 kHz to 230 MHz / 10W
- 6630: USB RF Power Sensor 9 kHz to 3 GHz
- 7010/00: EMI Receiver 150 kHz to 1 GHz
- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/02: EMI Receiver 9 kHz to 30 MHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- 9180: EMI Receiver 6 GHz to 18 GHz
- FR4003: Field Receiver 9 kHz to 30 MHz
- COND-IS: RF Conducted Immunity System
- RAD-IS: RF Radiated Immunity System
- AUT-IS: Automotive Immunity System

### Antennas/Calibration services

- BC-01: Biconical Antenna 30 to 200 MHz
- DR-01: Double-ridged horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- TR-01: 60-180 cm wooden extendable tripod
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- Antenna Set AS-04 (BC01+LP04+TR01)
- Antenna Set AS-05 (BC01+LP04+DR01+TR01)
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz
- Ansi 63,5 Antenna Factor
- SAE ARP 958-D
- Free-Space Antenna Factor
- CAL-6630: Traceable calibration
- LAT-6630: Accredited calibration

### LISNs/Probes

- L2-16B: single phase AMN, 16 A
- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 63 A
- L3-64/690V: 4 lines, 3-phase AMN, 63 A
- L3-100: 4 lines, 3-phase AMN, 100 A
- L1-150M: single-path, 50 Ohm AMN, 150 A
- L1-500: single phase AMN, 500 A
- L3-500: 4 lines, 3-phase AMN, 500 A
- L2-D: Delta LISN for telecom, 2 A, 150  $\Omega$
- RF-300: Van Veen Loop
- SBRF4: RF Switching Box
- SHC-1/1000: Voltage probe, 1000 Vac, 35 dB
- SHC-2/1000: Voltage probe, 1000 Vac, 30 dB
- EP-600: Field probe 100 kHz to 9,25 GHz 0,14 to 140 V/m
- EP-601: Field probe 10 kHz to 9,25 GHz 0,5 to 500 V/m
- EP-602: Field probe 5 kHz to 9,25 GHz 1,5 to 1500 V/m
- EP-603: Field probe 300 kHz to 18 GHz 0,17 to 170 V/m
- EP-604: Field probe 300 kHz to 26,5 GHz 0,4 to 800 V/m
- OR03: Optical Programmable Repeater with probes



A BRAND OF



an 18 Communications Company

Sales:  
Via Leonardo da Vinci, 21/23  
20090 Segrate (Milano) - ITALY  
Phone: +39 02 2699871  
Fax: +39 02 26998700

E-Mail: [nardait.support@L3T.com](mailto:nardait.support@L3T.com)  
Internet: [www.narda-sts.it](http://www.narda-sts.it)

Headquarters:  
Via Benessea, 29/B  
17035 Cisano sul Neva (SV) - ITALY  
Phone: +39 0182 58641  
Fax: +39 0182 586400