


SCHWARZBECK MESS - ELECTRONICS

On the blade 29 D-69250 Schönau Tel.: 06228/1001 Fax.: (49) 6228/1003

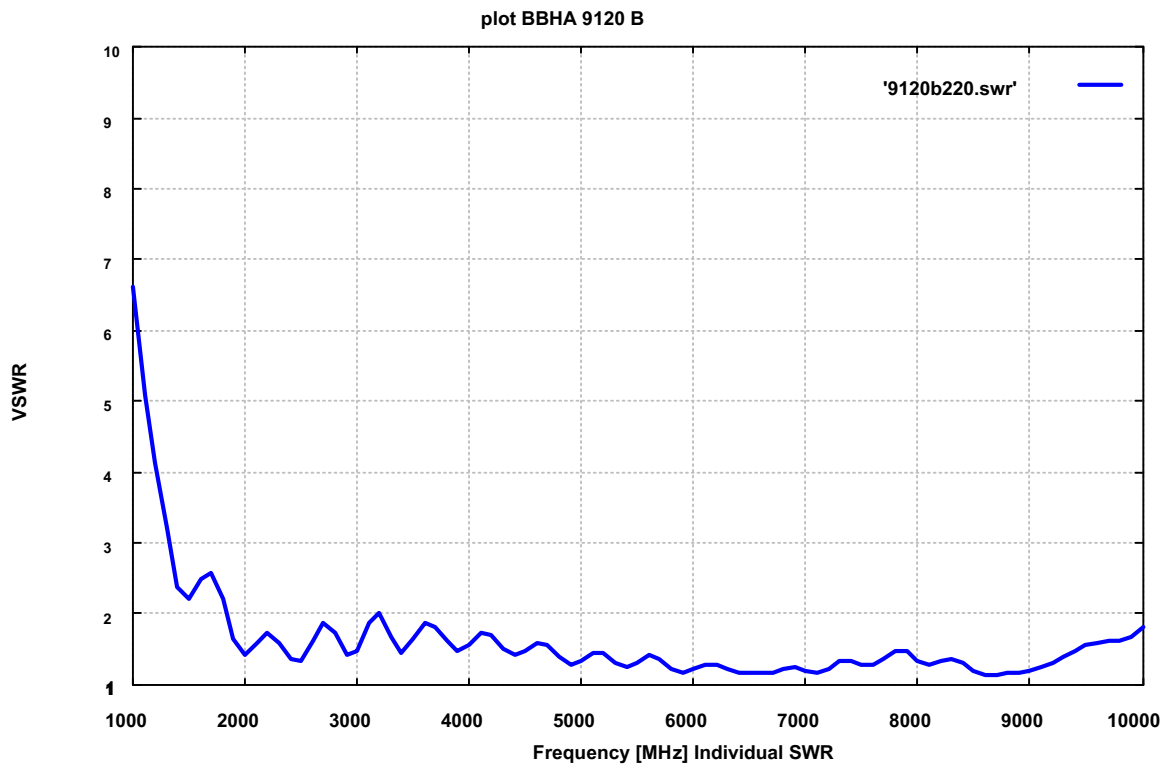

Interposing an attenuator is expedient if the connected device has a high self-SWR (eg in the 0 dB position of the input divider). Then

these damping to the Antennenwandlungsmaß to add or subtract from profits.

Insertion of attenuator is Advisable if the equipment presents a high internal SWR (eg in the 0 dB position of an internal step attenuator.

In this case the attenuation must be added to the antenna factor (dB / m) or Subtracted from the gain (dBi, dBd)

Serial number:	BBHA 9120 B 220	Serial Number:
Result:	OK	Test result:
Editor:	Dipl. - Ing D. Black Beck.	Operator:
Date:		Date: