




**Model 25S1G4A,
M1 through M6
25 Watts CW
0.8GHz–4.2GHz**

The Model 25S1G4A is a solid state, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting.

The 25S1G4A, when used with a sweep generator, will provide a minimum of 25 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 25S1G4A is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF amplifier stages are protected from over-temperature by removing the DC voltage to them if an over-temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions if an over-temperature or power supply fault has occurred. The unit can be returned to operate when the condition has been cleared. The 25S1G4A digital panel provides control of all amplifier functions both locally and remotely via IEEE-488 (GPIB) or RS-232 interfaces.

The low level of spurious signals and linearity of the Model 25S1G4A make it ideal for use as a driver amplifier in testing wireless and communication components and subsystems. It can be used as a test instrument covering multiple frequency bands and is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM etc. It is also suitable for EMC Test applications where undistorted modulation envelopes are desired.

25S1G4A Typical Performance

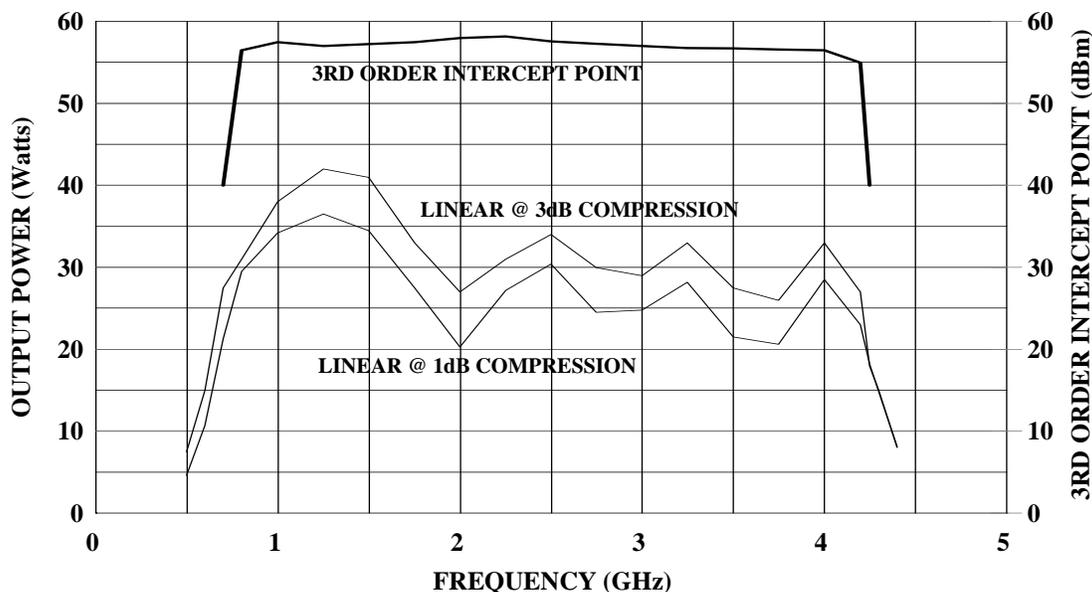

SPECIFICATIONS, MODEL 25S1G4A

RATED POWER OUTPUT.....	25 watts minimum
INPUT FOR RATED OUTPUT	1.0 milliwatt maximum
POWER OUTPUT @ 3dB COMPRESSSION	
Nominal	32 watts
Minimum	25 watts
POWER OUTPUT @ 1dB COMPRESSION	
Nominal	27 watts
Minimum	20 watts
FLATNESS	±1.5 dB typical ±2.0 dB maximum
FREQUENCY RESPONSE	0.8 – 4.2 GHz instantaneously
GAIN (at maximum setting)	44 dB minimum
GAIN ADJUSTMENT	(Continuous Range) 10 dB minimum (4096 steps remote)
INPUT IMPEDANCE	50 ohms VSWR 2.0:1 maximum
OUTPUT IMPEDANCE	50 ohms, nominal
MISMATCH TOLERANCE	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. (See Application Note #27)
MODULATION CAPABILITY	Will faithfully reproduce AM, FM, or pulse Modulation appearing on the input signal
THIRD ORDER INTERCEPT	See chart. The third order intercept points for this chart have been determined using two tones spaced 1 MHz apart. This is typical for W-CDMA systems. Closer tone spacing such as 60 kHz generally provides about a 1db to 3db improvement in the IP.
HARMONIC DISTORTION	Minus 20 dbc, max at 20 watts
SPURIOUS	Minus 73 dbc Typ.
PHASE LINEARITY	± 1.0 deg/100 MHz, Typ
PRIMARY POWER	(Selected Automatically) 90-132, 180-264 VAC 50/60 Hz, single phase 340 watts maximum
CONNECTORS	
RF	Type N female
REMOTE INTERFACES	
IEEE-488	24 pin female
RS-232	9 pin Subminiature D (female)
SAFETY INTERLOCK	15 pin Subminiature D
COOLING	Forced air (self contained fans)

MODEL CONFIGURATIONS

MODEL	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
25S1G4A	Type N female on front panel	Type N female on front panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM1	Type N female on rear panel	Type N female on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
25S1G4AM2	Same as 25S1G4A with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM3	Same as 25S1G4AM1 with enclosure removed for rack mounting		25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM4	Type N female on front panel	4 SMA females on rear panel	35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in
	Single RF input, Four independent RF outputs with Rated Power out of 6 watts each.			
25S1G4AM5	Type N female on front panel	Type N female on rear panel Enclosure removed for rack mounting.	25.6 kg (57.0 lb)	48.3 x 17.8 x 54.6 cm 19.0 x 7.0 x 21.5 in
25S1G4AM6	Same as 25S1G4A with an internal 40 dB directional coupler. The forward and reflected output sample ports are Type N connectors located on the front panel.		35.0 kg (77.0 lb)	50.3 x 20.3 x 54.6 cm 19.8 x 8.0 x 21.5 in