


# Mobile Shield

The APREL Mobile Shield is an add-on option for use with the EM-ISight automated test system. This mobile shield is designed to allow for easy integration of the EM-ISight system so as to provide isolation from ambient noise sources that would normally be detected by the system. Features an automated door operated by the push of a button.

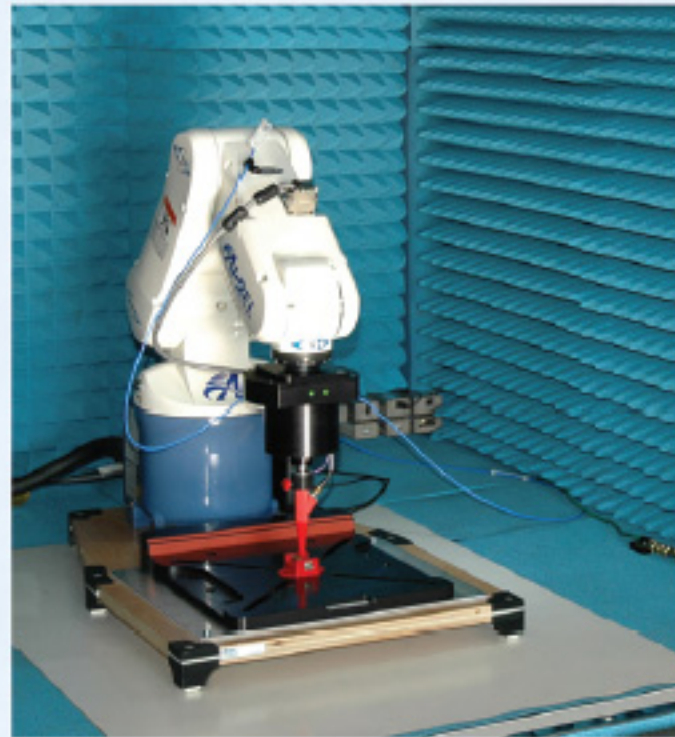

Features	Description
Dimensions	Standard configuration: W 85cm x H 120cm x L 115cm Door size : 75 x110 cm W 90cm x H 120cm x L 115cm W 110cm x H 120cm x L 115cm
Electrical	110 or 220 V
Door	Electrical push button door, single knife
Absorber	Graphite cone type
Isolation	Electrical fields and plane waves 100dB @ 0.30-18GHz
Panel Type	Zinc plated steel plate 2mm thick
Power Line Filter	220Vac 50/60Hz 10A single phase
Standard Interface Panel	2 x USB, 3 x D/C Jack, 1 x VGA, 1 x RJ45 (includes filter) 2 x SMA
Lighting	LED (12 VDC)
Optional	Additional sizes, panel interfaces, HDMI filters, USB3 and others on request.

Custom connector & panel solutions available upon ordering.

