


BULK CURRENT INJECTION

The F-140 is used for BCI testing in accordance with automotive specifications like SAE J15447 as well as diagnostic bulk current injection testing up to 1300 MHz. The useable frequency range is 100 kHz – 1300 MHz with an insertion loss of less than 7 dB from 700 kHz to 500 MHz. The input power rating is 100 watts for 30 minutes.

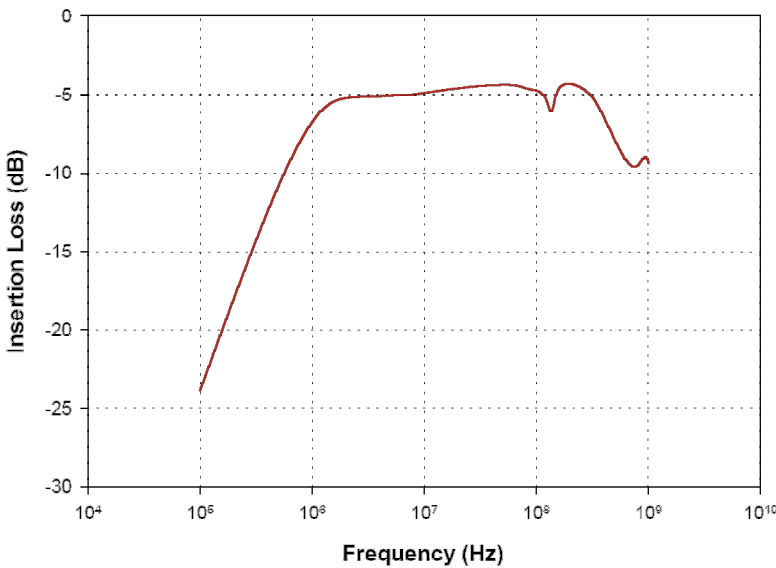

Specifications

Frequency: 10 kHz – 1 GHz
Inner diameter: 40 mm
Outer diameter: 127 mm
Height: 70 mm
Input Power rating: 100 watts

Accessories

FCC-BCICF-2 • Calibration Fixture
Bandwidth: 100 kHz – 1 GHz
F-61 • Current Probe
Bandwidth: 1 MHz – 1 GHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.