


Injection Probe Calibration Fixtures are a part of the test equipment required by most of the Bulk Current Injection test procedure specifications. The FCC-BCICF-1 calibration fixture allows the user the quickly and easily calibrate the injection probe prior to performing compliance testing.

This calibration fixture offers two important benefits.

1. Due to variable circuit impedances or resonances in cables and cable looms, the calibration fixture is used to establish the forward power into the injection probe needed to develop the specified currents in the system under test.
2. The fixture can be used to measure the injection probes insertion loss.

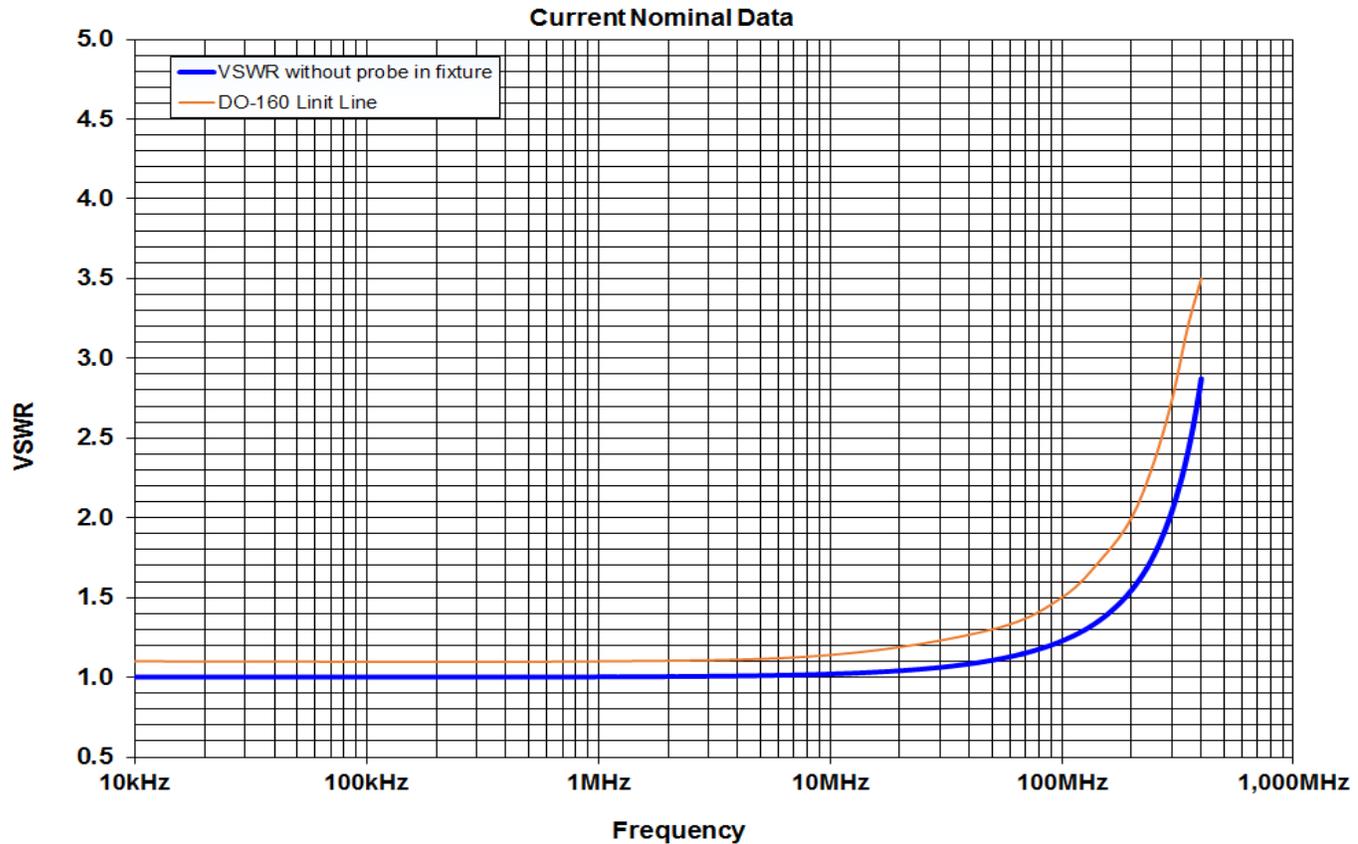

Specifications

Frequency: 10 kHz – 400 MHz

VSWR: Meets DO-160 standalone limit line

Dimensions: (L x W x H) 250mm x 177mm x 175mm

Weight: 2.5kg

Injection Probe Model Numbers: F-120-1, F-120-2, F-120-3, F-120-6, F-120-6A, F-120-9, F-120-9B, F-130A, F-130-1, F-130-1A, F-130A-1, F-100701-1008-1, F-100903-1008-1



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: Sales@fischerCC.com

© Fischer Custom Communications, Inc.
600210

All rights reserved • Printed in USA

FCC-BCICF-1